




SIVA INSTRUMENTS

An ISO 9001:2008 Company

# Enameled Wire Tan Delta System

Model: EW188

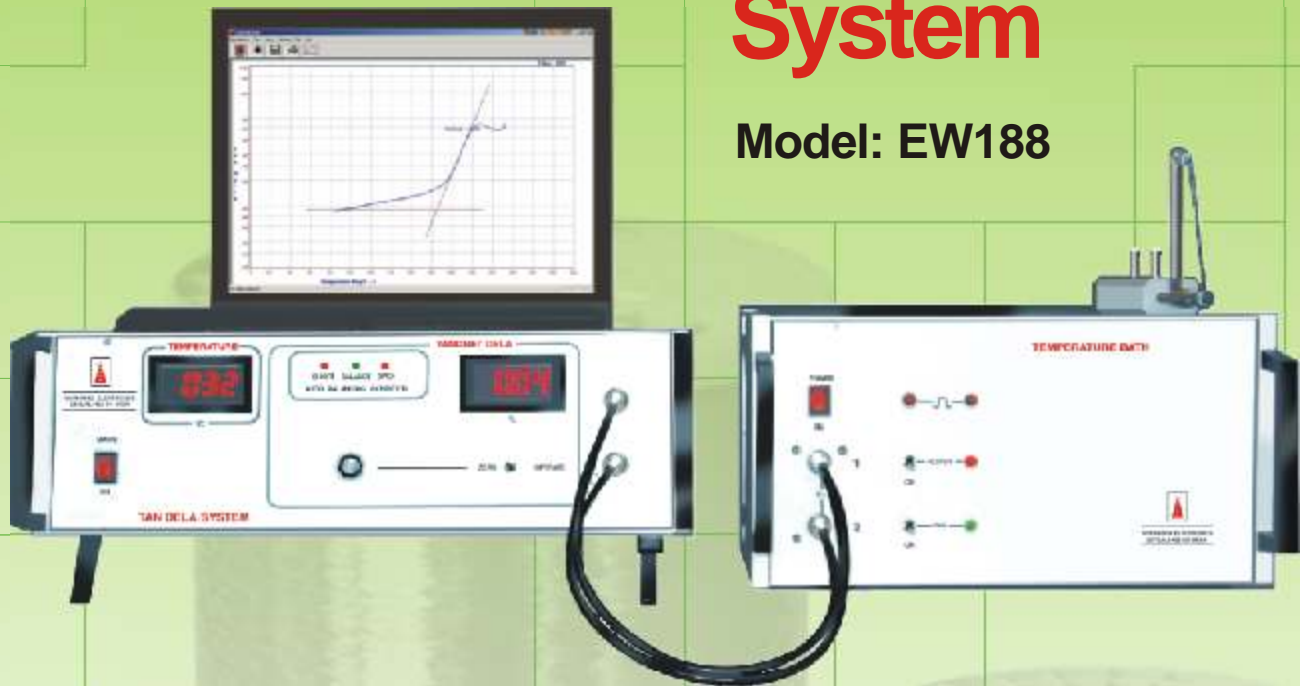

Equipments  
Supplied to 37  
Countries



## TAN DELTA SYSTEM EW-188

is specially designed for quality control of enameled wire. Tangent delta and the tangent data temperature Characteristic are the concepts often discussed in connection with enameled copper wire. The precise measurement of tangent delta is of higher importance for the characterization of hardening state of the enameled insulation. If an alternating voltage is applied to wire enamel, a small current passes through it which is phase shifted. A yard stick for this phase shift is tangent delta. In EW-188 a measuring frequency of 1 KHz sine voltage is applied to the sample. The result is phase shift between voltage and current which is proportional to tangent delta. This phase shift is detected with very precise phase detector circuit.

EW-188 can be used for single point measurement as well as determinations of bending point. The temperature can be set anywhere upto 300 degree Celsius for single point measurement. Tan delta and temperature are displayed simultaneously. Further more the curve measurement can be automated on a Laptop PC through suitable windows based software.

## Specifications:

<b>Power Supply</b>	:	230V AC +/-10%, 50Hz +/-3 %
<b>Test Voltage</b>	:	10 VAC Peak to Peak
<b>Test Frequency</b>	:	1KHz
<b>Tan Delta Range</b>	:	0.00% to 19.99%
<b>Indication</b>	:	3 ½ Digit Panel Meter
<b>Resolution</b>	:	0.01%
<b>Accuracy</b>	:	+/-1% of reading
<b>Temperature Range</b>	:	Ambient to 300°C
<b>Indication</b>	:	3½ Digit Panel Meter
<b>Resolution</b>	:	1°C
<b>Accuracy</b>	:	+/- 1% of reading.
<b>Temperature Control</b>	:	PID
<b>Accuracy</b>	:	+/- 1°C
<b>Cabinet</b>	:	Powder coated sheet metal table top cabinet with lifting handles
<b>Controls</b>	:	Power ON, ZERO/OPERAT
<b>Printer</b>	:	External Inkjet Printer
<b>Port</b>	:	USB communication port
<b>Software</b>	:	Windows based Data Acquisition software
<b>Display</b>	:	Large Backlit LCD Display to display Test Menu, Set up Screens, Test Result
<b>Storage Memory</b>	:	More than 10000 Test Results
<b>Safety Standards</b>	:	Meeting IEC 61010-1
<b>Accessories</b>	:	Sample Holder, Standard Capacitor, Transport case. Users/instruction manual
<b>Temperature Range</b>	:	Operating 0 50°C s
<b>Humidity Range</b>	:	80% Rh at 40°C      Storage 5 to 70°C

## Features:

- Digital readout for temperature & tan delta.
- Software based PID temperature control.
- Windows based user friendly software.
- USB communication port for laptop connection.
- Multiple graph comparison on screen.
- Suitable for single point as well as bending point measurement.
- Fast curve plotting.
- Auto balancing



Atelier-1109

To keep pace with the latest technology Sivananda Electronics reserves the right to update its system. Hence, information in the brochure is likely to change without notice.

## SIVANANDA ELECTRONICS

DEEPAK MAHAL, LAM ROAD, DEVLALI-422 401. NASHIK, MAHARASHTRA, INDIA.  
Phone: 0253-2491423, 2491504, 2491816, E-mail: mkb@sivanandaelectronics.com. Fax: 0253-2492291.

**MUMBAI** : 208, SAHAR PLAZA COMPLEX, ANDHERI KURLA ROAD, ANDHERI, MUMBAI-400 059.  
PHONE: 022-28271046, 66430590 / 91. FAX: 022-28389232 E-mail: sivabom@vsnl.com

**NEW DELHI** : G-145, KALKAJI, NEW DELHI-110 019. PHONE: 011-26221582, 26434442. E-mail: sivadelhi@bol.net.in

**BANGALORE** : 44/2, DICKENSON ROAD, BANGALORE-650 042. PHONE: 080-25585673, 25597416. E-mail: sivabl@vsnl.net

**HYDERABAD** : 102, ART PLAZA, YWCA LANE, NEAR HIRA HALL, BOGGUL KUNDA, ABIDS, HYDERABAD-500 001. PHONE: 040-30629539

MFRS. OF : ELECTRONIC INSTRUMENTS, METAL DETECTORS, TURNSTILES, PERIMETER PROTECTION SYSTEMS

Visit us at: [www.sivanandaelectronics.com](http://www.sivanandaelectronics.com) [www.sivanandaelectro.com](http://www.sivanandaelectro.com)